


8-port 10G Switch

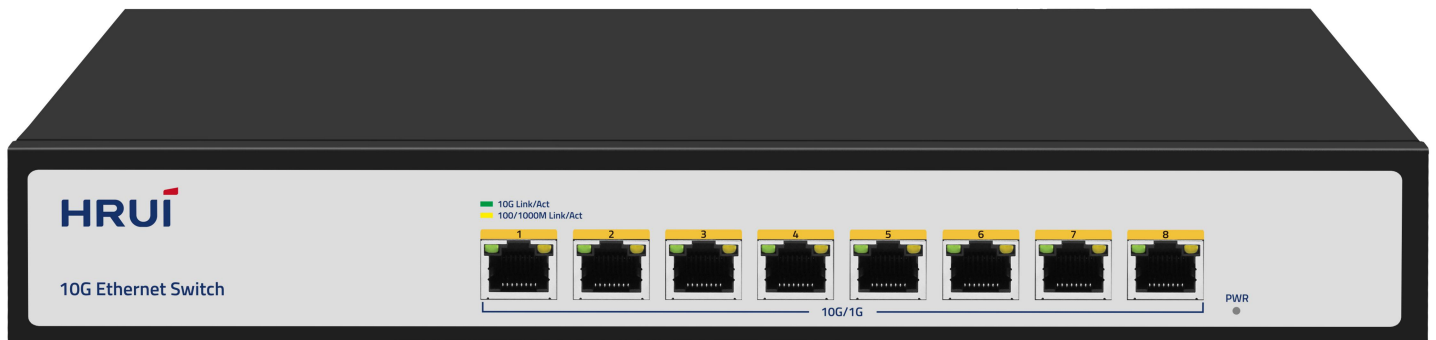


Highlights

- 8 *10G RJ45 ports
- Supports IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3 bz, IEEE 802.3 ae, IEEE 802.3. x, IEEE 802.3az
- RJ45 port supports 100/1000Mbps/2.5G/5G/10G adaptive
- Supports automatic port flipping (automatic MDI/MDIX)
- The panel indicator lights will monitor the working status and assist in fault analysis
- Flow control mode, full duplex using IEEE802.3x standard, half duplex using backpressure standard
- Supports VLAN transparent transmission and giant frame function

Specifications

Product Application

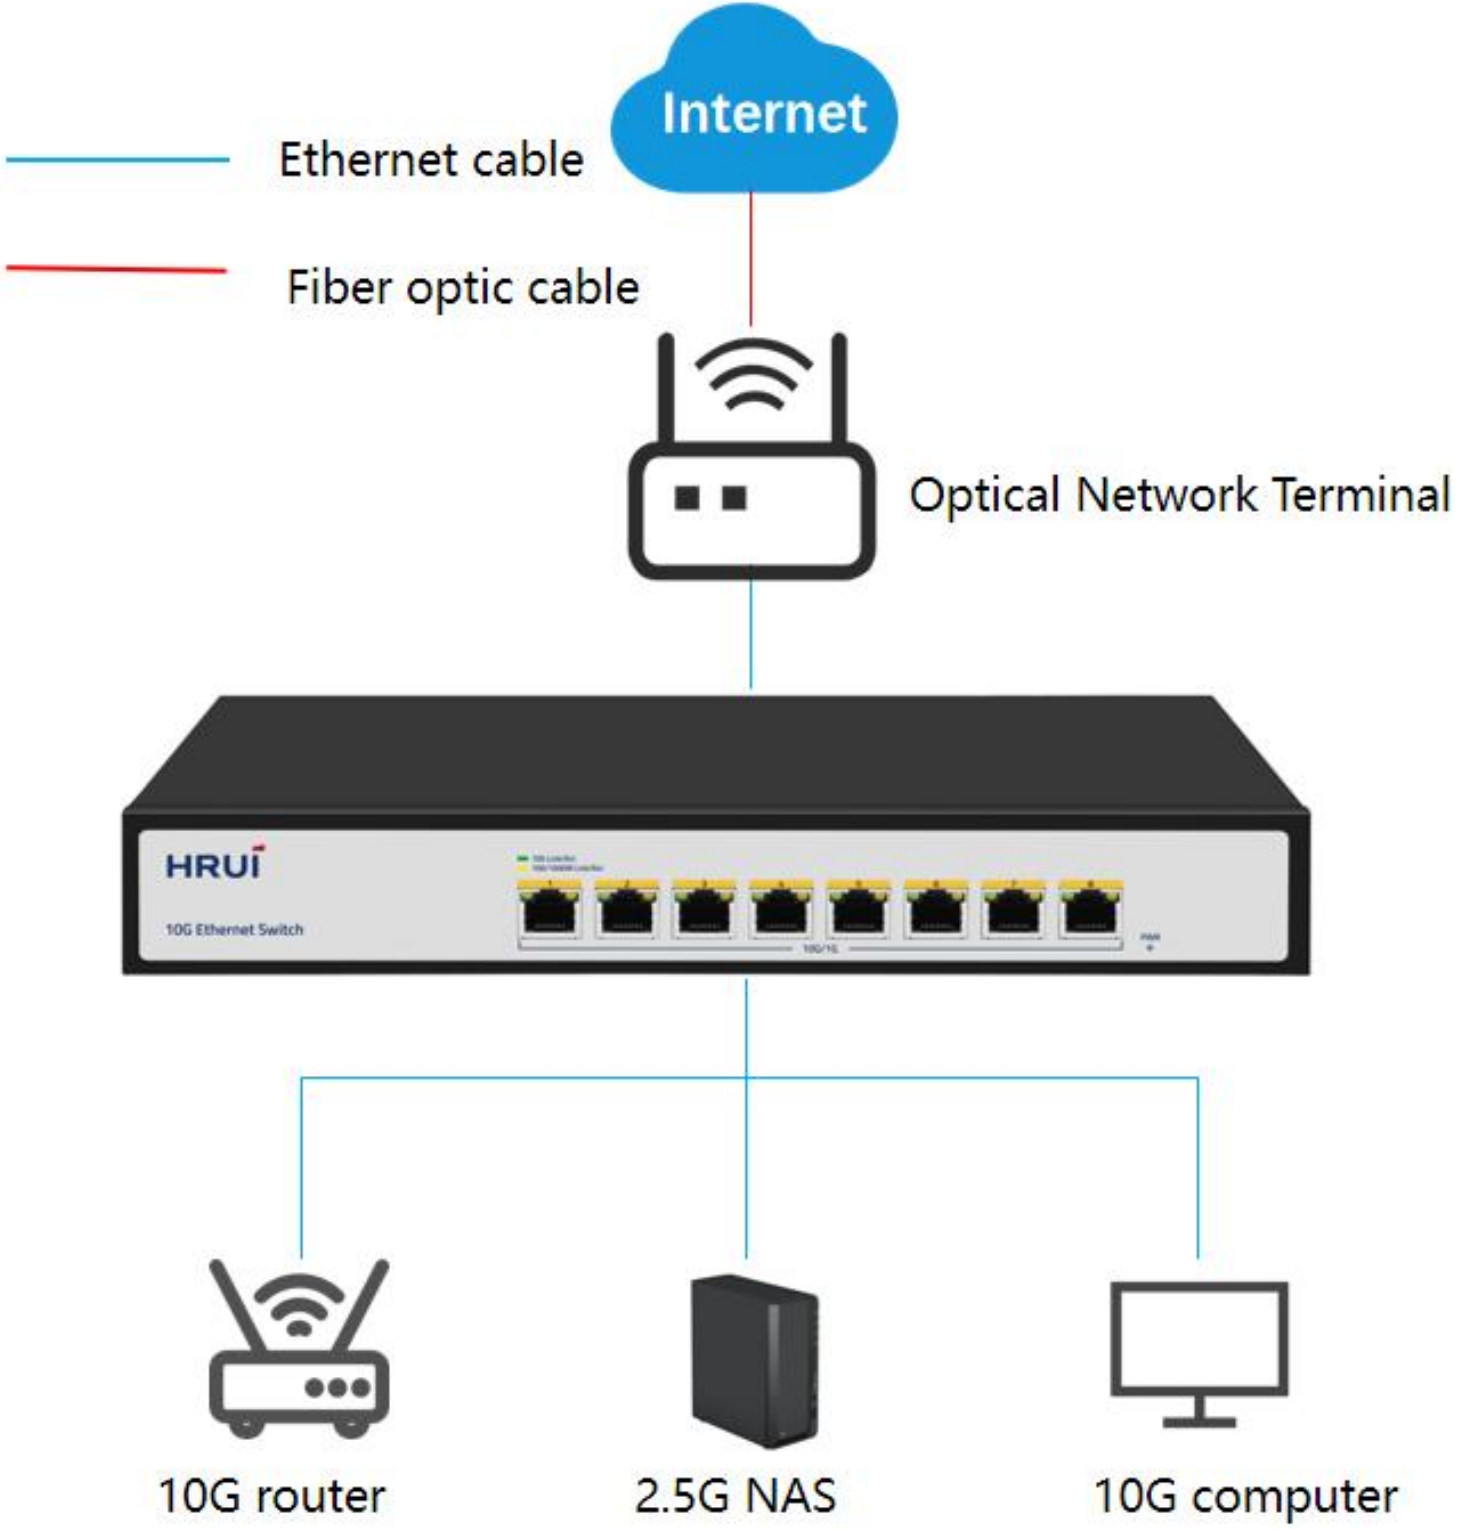

Specifications

Hardware Features & Performance		
Model		HR-SWTG0C80N
General	Interface	8 *10G RJ45 ports
	Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE 802.3ab (Gigabit Ethernet) IEEE 802.3az (Efficient and Energy saving Ethernet) IEEE 802.3ae (10 Gigabit Ethernet) IEEE802.3x (Flow Control) IEEE802.3 bz (2.5G/5G Ethernet standard)
Performance	Switching Capacity	160Gbps
	Packet Forwarding Rate	119.04Mpps
	Packet Buffer	12Mbit
	MAC Address Table	16K
	Transmission Method	Store and Forward
Physical	Power Supply	AC 100-240V, 50/60Hz DC 12V 8A
	Mainboard Power Consumption	13.8W
	Structure Information	Product Dimensions:320*207*45mm Packaging Dimensions:370*290*85mm Product Net Weight:1.72KG Product Gross Weight:2.12KG
	Packing Information	Carton Dimensions:445*310*390mm Packing Quantity: 5PCS Packing Weight: 11.6KG
	Packing List	switch 1pcs, Power cord 1pcs, instruction manual 1pcs, certificate of qualification 1pcs
	Fan Quantity	1
	Installation	desktop
Environment	Surge Protection	Surge protection: common mode 6KV (Class C); Electrostatic ESD: Air 8KV, Contact 6KV (Class C)
	Operating Temperature	0~40°C
	Storage Temperature	-40°C to 70°C
	Operation Humidity	10%~90%, non condensing
	Storage Humidity	5%~95%, non condensing

Specifications

Hardware Features & Performance		
Buttons & Indicator Lights	PWR	On: Powered on Off: Powered off
	Port Indicator Light (Green)	On: 10G link connection is normal Flashing: Data transmission is normal OFF: Link blocked
	Port Indicator Light (Yellow)	On: 1000Mbps link connection is normal Flashing: Data transmission is normal OFF: Link blocked

Specifications

Product Pictures



Product Structure Diagram

