


# 90W 10G PoE Injector

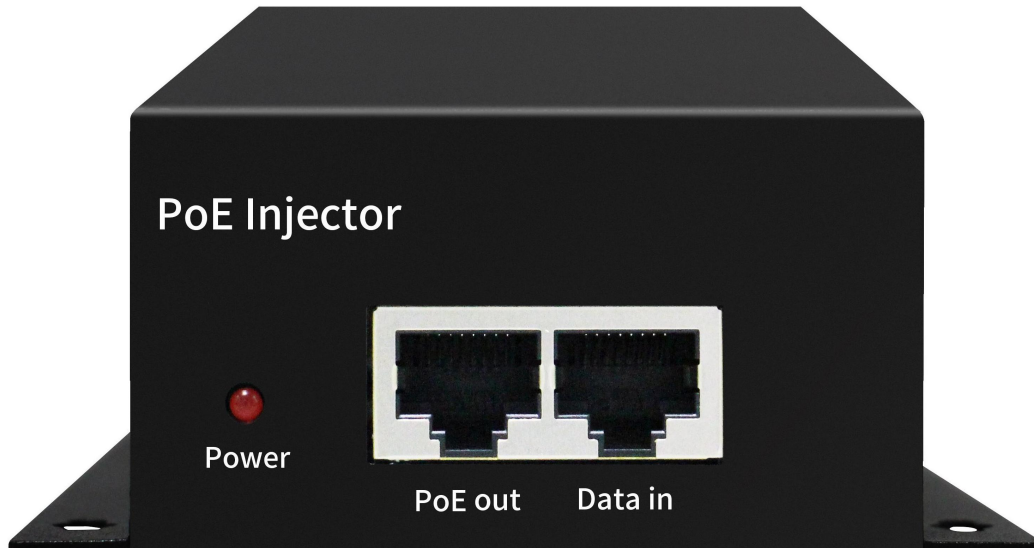

## Product Highlights

- Support 1\*10G PoE power supply port+1\*10G RJ45 port
- Comply with IEEE802.3af (15.4W), IEEE802.3at (30W), and IEEE802.3bt (90W)
- Support AC 100-240V power supply
- Metal casing, IP20 protection level, operating temperature range of -20~50°C

## Hardware Features

Description	Specification
Model	HR200-BTTG-N901
Interface	1*10G PoE Port 1*10G RJ45 Port
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3ab (1000Mbps Ethernet) IEEE802.3ae (10G Ethernet) IEEE802.3x (Flow Control)
PoE Standard	15.4 W (IEEE 802.3af) 30 W (IEEE 802.3at) 90 W (IEEE 802.3bt)
PoE Port Output Voltage	DC 44-57V
Power Supply	AC 100-240V 50/60Hz DC 52V 1.92A
PoE port	Port PoE power output<90W
Structure Information	Product Dimensions: 186*92*41mm Packaging Dimensions: 245*190*60mm Product Net Weight: 0.47KG Product Gross Weight: 0.71KG
Packing Information	Carton Dimensions: 520*320*400mm Packing Quantity: 20PCS Packing Weight: 15.2KG
Package Contents	Injector 1pcs, Manual 1pcs, Certificate of Inspection 1pcs
Certification	CE, FCC, RoHS
Installation	Wall Mounting
Operating Temperature	-10~50°C
Storage Temperature	-40~85°C
Operation Humidity	5%~90%, non condensing
Storage Humidity	5%~95%, non condensing
PWR	On: Powered on Off: Powered off
Surge protection	Port surge: Differential mode 2KV, Common mode 6KV Electrostatic ESD 6KV, Air 8KV

# Product Structure Diagram

