


100Mbps Ethernet PoE Extender

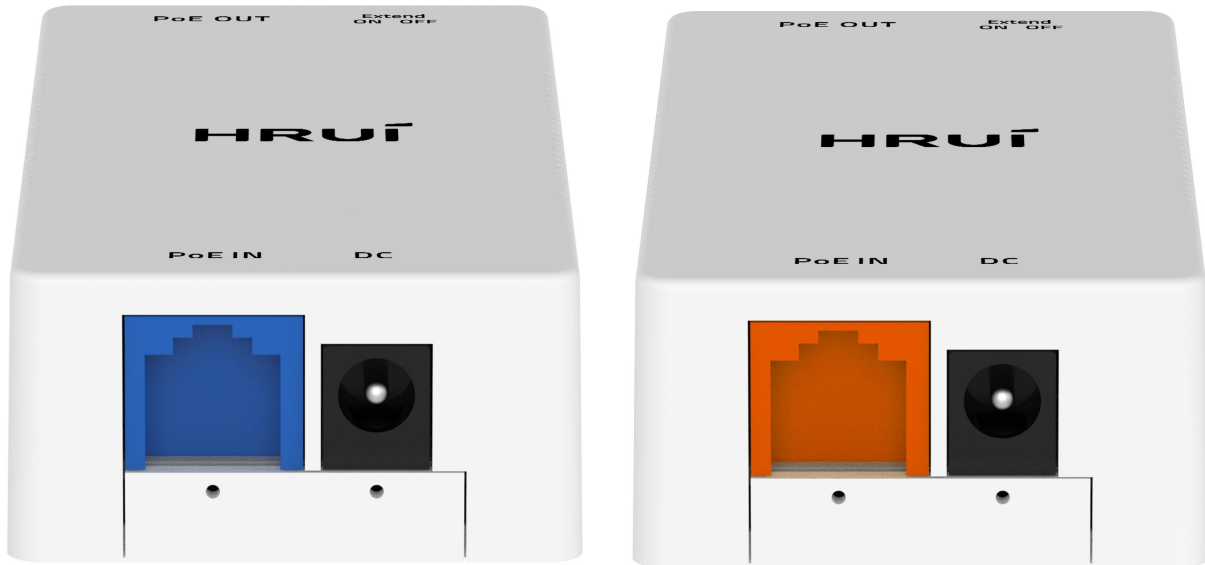

Product Highlights

- 1 *100Mbps PoE in port+1 *100Mbps PoE out port
- Compliant with IEEE 802.3, IEEE 802.3u, and IEEE 802.3x standards
- Support IEEE802.3af/at power supply standard
- Supports 800 meter transmission
- Support network and PoE expansion

Hardware Features

Description	Specification
Model	HR-PE08-IPC+/SV+
Interface	1 *100Mbps PoE in port 1 *100Mbps PoE out port
Port Standard	IEEE802.3 (Ethernet) IEEE802.3u (Fast Ethernet) IEEE802.3x (Flow Control)
Switching Capacity	0.4Gbps
Packet Forwarding Rate	0.297Mpps
MAC Address Table	2K
Transmission Method	Store and Forward
PoE Standard	IEEE802.3af (15.4W) IEEE802.3at (30W)
PoE Port Output Voltage	DC 44-57V
PoE Port	Port PoE power output <30W
PoE Power Budget	30W
Structure Information	Product Dimensions :100*49*25mm Packaging Dimensions : 102*50*27mm Product Net Weight:0.060KG Product Gross Weight:0.065KG
Packing Information	Carton Dimensions :430*295*275mm Packing Quantity: 200PCS Packing Weight: 14KG
Package Contents	Extender 1pcs,manual 1pcs, certificate of qualification 1pcs
Installation	desktop
Surge Protection	Port Surge: common mode 4KV, differential mode 2KV Electronic ESD: air 8KV
Operating Temperature	0~40°C
Storage Temperature	-40 °C to 70 °C
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
Extend Button	ON: Normal mode, transmission distance is within 100 meters Extend: Link extension mode, PoE power supply and data transmission distance can be extended to 800 meters, transmission speed is 10Mbps
Port Led	On:Link normal Off: Link blocked Blinking: Data transmitting

Product Structure Diagram

