


5-port Gigabit Ethernet Switch

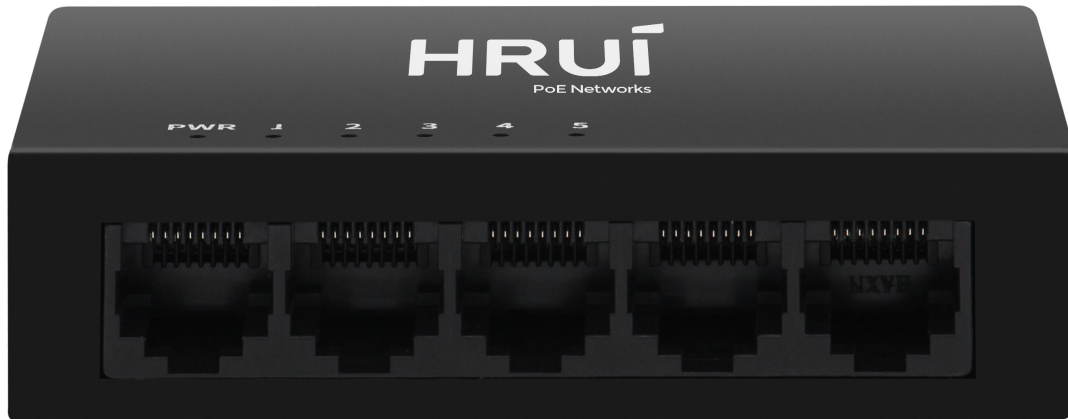

Product Highlights

- 5 *1G RJ45 ports
- Compliant with IEEE802.3 and IEEE802.3u,IEEE802.3az,IEEE802.3ab standards
- RJ45 port supports 10M/100M/1G adaptive
- Supports automatic port flipping (Auto MDI/MDIX)
- The panel indicator LED will monitor the working status and assist in fault analysis
- Flow control method, IEEE802.3x standard for full duplex and Backpressure standard for half duplex

Hardware Features

Description	Specification
Model	HR-SWG0050-M
Interface	5 *1G RJ45 ports
Port Standard	IEEE802.3 (Ethernet)
	IEEE802.3u (Fast Ethernet)
	IEEE802.3x (Flow Control)
	IEEE802.3ab (Gigabit Ethernet)
	IEEE802.3az(Energy Efficient Ethernet)
Switching Capacity	10Gbps
Packet Forwarding Rate	7.44Mpps
Packet Buffer	3Mbit
MAC Address Table	2K
Transmission Method	Store and Forward
Power Supply	AC 100-240V , 50/60Hz
	DC 5V 1A
Mainboard Power Consumption	2.1W
Structure Information	Product Dimensions :87*54*23mm
	Packaging Dimensions : 90*88*58mm
	Product Net Weight: 0.13Kg
	Product Gross Weight:0.20Kg
Packing Information	Carton Dimensions :470*320*380mm
	Packing Quantity: 100PCS
	Packing Weight:21KG
Package Contents	switch 1pcs, Power adapter 1pcs, manual 1pcs, certificate of qualification 1pcs
Fan Quantity	0
Installation	desktop
Surge Protection	Surge protection: common mode 2KV, differential mode 1KV (Class C); Electrostatic ESD: air 4KV, contact 3KV (Class C)
Operating Temperature	0~40℃
Storage Temperature	-40 ℃ to 70 ℃
Operation Humidity	10%~90%, non condensing
Storage Humidity	5%~95%, non condensing
PWR LED	Green LED On: Powered on
	Green LED Off: Powered off
1-5 LED	Green LED On:Link normal
	Green LED Off: Link blocked
	Flashing: Data transmitting

Product Structure Diagram

